


APPLICATION

Safety system for automatic footvalve closure in case of fire.


- **Construction**
Stainless steel 316 L
- **Simple design**
- **Easy adaptation on any existing tank container**
- **Bureau VERITAS**
certificate inspection n° 1210008 / EN

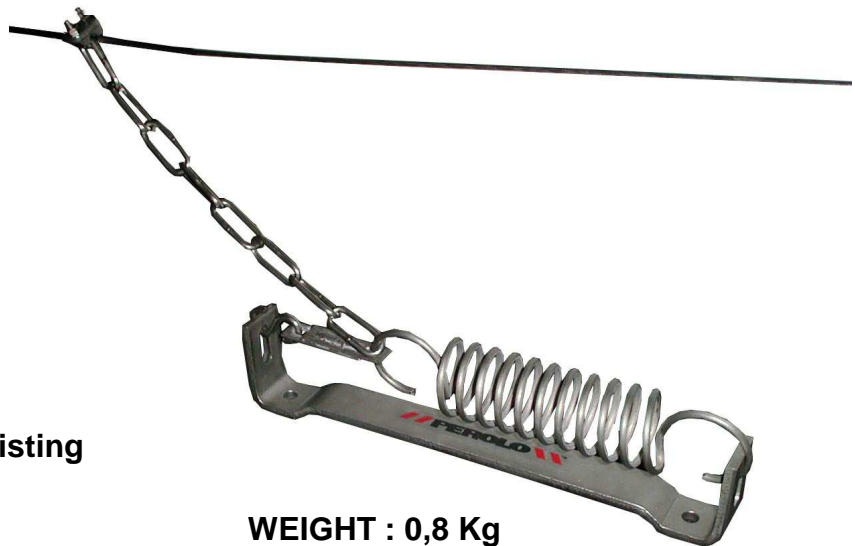

WEIGHT : 0,8 Kg

– *mandatory as from 1st October 2004*

The fusible link device attached to remote control cable allows the automatic and immediate closing of the footvalve when the temperature reaches 121°C / 250°F.

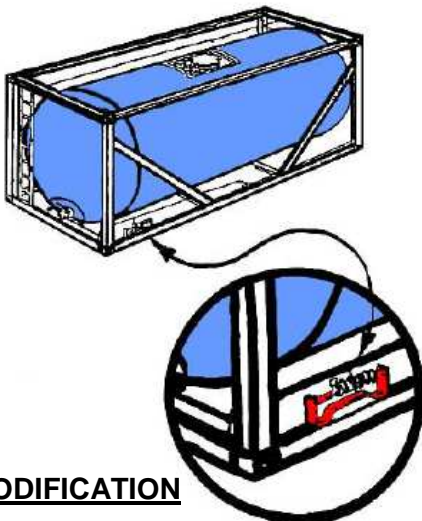

- Easy and quick fit on the container frame, it operates with a pre-energised spring with fusible link.
- The spring is linked to the footvalve remote control and will pull the cable as soon when the fusible link melts (45 Kg strain).
- Installation instructions are supplied with the system.

CODIFICATION

DESCRIPTION	PART N°
FUSIBLE LINK for CISCO / NEATCO & NEATFLOW footvalve	11.11.20.00.00